



COLOUR CODED COPPER CRIMPING LUGS

CL-D

double hole long barrel - for Copper conductors

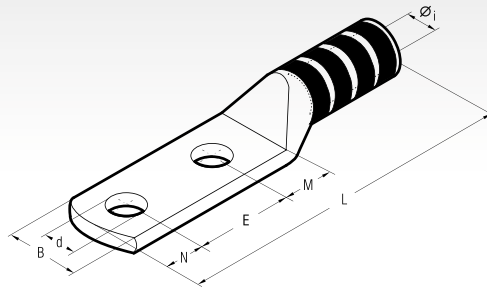

Cond. Size sqmm	Conductor AWG Size	Navy	Ø Stud mm	Type	Dimensions mm							Colour Code	Quantity Box/Bag	Mechanical Tools	Hydraulic Tools						
					Øi	B	M	E	N	L	d										
10	8	23	6	CL8-D14	4,6	11,0	7,0	16,0	6,0	53,0	6,4	RED	400/50	B15MD							
			6	CL8-D141	4,6	11,0	7,0	19,0	6,0	56,0	6,4	RED	400/50								
			10	CL8-D38	4,6	18,0	11,0	25,5	10,0	70,5	10,5	RED	400/50								
16	6	40	6	CL6-D14	5,8	11,5	7,0	16,0	6,0	54,5	6,4	BLUE	400/50			B15MD					
			6	CL6-D141	5,8	11,5	7,0	19,0	6,0	57,5	6,4	BLUE	400/50								
			10	CL6-D38	5,8	18,0	11,0	25,5	10,0	72,0	10,5	BLUE	400/50								
25	4	40	12	CL6-DN	5,8	20,0	14,0	44,5	12,0	96,0	13,2	BLUE	400/50					B15MD			
			6	CL4-D14	6,2	12,5	7,0	16,0	6,0	62,0	6,4	GREY	200/50								
			6	CL4-D141	6,2	12,5	7,0	19,0	6,0	65,0	6,4	GREY	200/50								
3	50	40	10	CL4-D38	6,2	18,0	11,0	25,5	10,0	79,5	10,5	GREY	200/50							B15MD	
			12	CL4-DN	6,2	20,0	14,0	44,5	12,0	103,5	13,2	GREY	200/50								
			10	CL3-D38	7,0	18,0	11,0	25,5	10,0	79,5	10,5	WHITE	200/50								
35	2	60	12	CL3-DN	7,0	21,0	14,0	44,5	12,0	103,5	13,2	WHITE	200/50	B15MD							
			6	CL2-D14	7,6	17,0	7,0	16,0	6,0	61,0	6,4	BROWN	200/50								
			6	CL2-D141	7,6	17,0	7,0	19,0	6,0	64,0	6,4	BROWN	200/50								
1	75	60	10	CL2-D38	7,6	19,0	11,0	25,5	10,0	78,5	10,5	BROWN	100/50			B15MD					
			10	CL2-DN38	7,6	19,0	11,0	44,5	10,0	97,5	10,5	BROWN	100/50								
			12	CL2-DN	7,6	21,0	14,0	44,5	12,0	102,5	13,2	BROWN	100/50								
50	1/0	100	6	CL1-D14	8,9	17,0	7,0	16,0	6,0	63,0	6,4	GREEN	200/50					B15MD			
			6	CL1-D141	8,9	17,0	7,0	19,0	6,0	66,0	6,4	GREEN	200/50								
			10	CL1-D38	8,9	19,0	11,0	25,5	10,0	80,5	10,5	GREEN	100/25								
70	2/0	125	12	CL1-DN	8,9	21,0	14,0	44,5	12,0	104,5	13,2	GREEN	100/25							B15MD	
			6	CL1/0-D14	10,0	19,0	7,9	16,0	7,0	68,0	6,4	PINK	100/25								
			6	CL1/0-D141	10,0	19,0	7,9	19,0	7,0	71,0	6,4	PINK	100/25								
95	3/0	150	10	CL1/0-D38	10,0	20,0	10,9	25,5	10,0	83,5	10,5	PINK	100/25	B15MD							
			12	CL1/0-DN	10,0	21,0	14,0	44,5	12,0	107,5	13,2	PINK	100/25								
			6	CL2/0-D14	11,3	21,0	7,8	16,0	7,0	76,0	6,4	BLACK	60/30								
120	MCM	250	6	CL2/0-D141	11,3	21,0	7,8	19,0	7,0	79,0	6,4	BLACK	60/30			B15MD					
			10	CL2/0-D38	11,3	21,0	11,0	25,5	10,0	91,5	10,5	BLACK	60/30								
			12	CL2/0-DN	11,3	22,0	14,0	44,5	12,0	115,5	13,2	BLACK	60/30								
150	MCM	300	6	CL3/0-D141	12,4	23,3	8,0	19,0	7,0	82,0	6,4	ORANGE	60/30					B15MD			
			10	CL3/0-D38	12,4	23,3	11,0	25,5	10,0	94,5	10,5	ORANGE	60/30								
			12	CL3/0-DN	12,4	24,0	14,0	44,5	12,0	118,5	13,2	ORANGE	60/30								
185	MCM	350	6	CL4/0-D141	13,5	25,0	13,0	19,0	11,0	94,0	6,4	PURPLE	50/25							B15MD	
			10	CL4/0-D38	13,5	25,0	11,0	25,5	10,0	97,5	10,5	PURPLE	50/25								
			10	CL4/0-DN38	13,5	25,0	11,0	44,5	10,0	116,5	10,5	PURPLE	50/25								
240	MCM	500	12	CL4/0-DN	13,5	25,0	14,0	44,5	12,0	121,5	13,2	PURPLE	50/25	B15MD							
			10	CL250-D38	15,2	28,5	11,0	25,5	10,0	103,0	10,5	YELLOW	40/20								
			12	CL250-DN	15,2	28,5	14,0	44,5	12,0	127,0	13,2	YELLOW	40/20								
300	MCM	600	10	CL300-D38	16,7	31,5	13,0	25,5	11,0	116,0	10,5	WHITE	30/15			B15MD					
			12	CL300-DN	16,7	31,5	16,0	44,5	14,0	141,0	13,2	WHITE	30/15								
			6	CL350-D141	17,6	33,0	13,0	19,0	11,0	109,5	6,4	RED	30/15								
400	MCM	400	10	CL350-D38	17,6	33,0	13,0	25,5	11,0	116,0	10,5	RED	30/15					B15MD			
			12	CL350-DN	17,6	33,0	16,0	44,5	14,0	141,0	13,2	RED	30/15								
			6	CL400-D141	19,2	35,5	13,0	19,0	11,0	118,5	6,4	BLUE	20/10								
240	MCM	500	10	CL400-D38	19,2	35,5	13,0	25,5	11,0	125,0	10,5	BLUE	20/10							B15MD	
			12	CL400-DN	19,2	35,5	16,0	44,5	14,0	150,0	13,2	BLUE	20/10								
			6	CL500-D141	21,1	39,0	13,0	19,0	11,0	119,5	6,4	BROWN	20/10								
300	MCM	750	10	CL500-D38	21,1	39,0	13,0	25,5	11,0	126,0	10,5	BROWN	10/5	B15MD							
			12	CL500-DN	21,1	39,0	16,0	44,5	14,0	151,0	13,2	BROWN	10/5								
			10	CL600-D38	23,7	44,0	20,0	25,5	11,0	149,5	10,5	GREEN	20/5								
300	MCM	600	12	CL600-DN	23,7	44,0	20,0	44,5	14,0	171,5	13,2	GREEN	20/5			B15MD					
			10	CL750-DN38	26,0	48,0	20,0	44,5	11,0	173,5	10,5	BLACK	15/5								
			10	CL750-D38	26,0	48,0	20,0	25,5	11,0	154,5	10,5	BLACK	15/5								
300	MCM	750	12	CL750-DN	26,0	48,0	20,0	44,5	14,0	176,5	13,2	BLACK	15/5					B15MD			



CL series lugs are manufactured from electrolytic Copper tube with a purity greater than 99.9%.

The dimensions of the tube are designed to obtain the most efficient electrical conductivity and mechanical strength to resist vibration and pull out.

Cembre lugs are annealed to guarantee optimum ductility, an absolute necessity for connectors which will have to withstand the severe deformation arising when compressed and any bending of the palm during installation.

In applications subject to vibration, terminals have to perform a reliable connection, the annealing process plays a vital role in avoiding cracking or breaks between the barrel and palm.

The barrel length has been designed to allow easy and accurate positioning of the dies during the crimping operation.

Lugs are electrolytically Tin plated to avoid oxidation.

The tongue is clearly marked with wire size and die index for Cembre tools.

UL listed for US and Canada per UL486A up to 35 KV.

CL series lugs are an important part of Cembre crimping systems for power carrying conductors.

Details of the appropriate crimping tools and dies are shown on page 257.

Cembre technicians are available to provide technical advice as required. Please consult Cembre for products not listed.